




## GRILLETE RECTO CON PERNO RECTO Y CHAVETA MOD. E-215

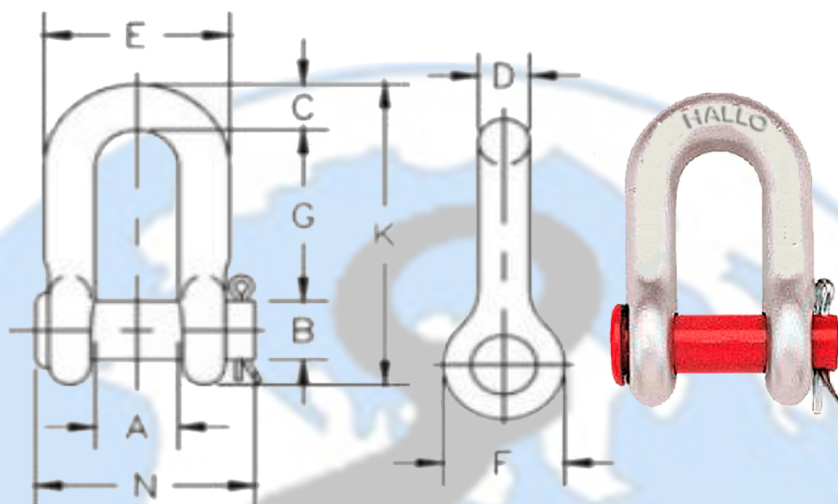

| TAMAÑO<br>NOMINAL EN<br>PULGADAS | CARGA LIMITE DE<br>TRABAJO EN<br>TONELADAS | PESO DE CADA<br>PIEZA EN<br>LIBRAS | DIMENSIONES EN .PULGADAS |      |      |      |      |      |      |       |      |
|----------------------------------|--------------------------------------------|------------------------------------|--------------------------|------|------|------|------|------|------|-------|------|
|                                  |                                            |                                    | A                        | B    | C    | D    | E    | F    | G    | K     | N    |
| 1/4"                             | 0.50                                       | 0.10                               | 0.47                     | 0.31 | 0.25 | 0.25 | 0.97 | 0.61 | 0.88 | 1.59  | 1.34 |
| 5/16"                            | 0.75                                       | 0.18                               | 0.53                     | 0.38 | 0.31 | 0.31 | 1.16 | 0.75 | 1.03 | 1.91  | 1.59 |
| 3/8"                             | 1.00                                       | 0.25                               | 0.66                     | 0.44 | 0.38 | 0.38 | 1.41 | 0.91 | 1.25 | 2.30  | 1.86 |
| 7/16"                            | 1.50                                       | 0.40                               | 0.75                     | 0.50 | 0.44 | 0.44 | 1.63 | 1.06 | 1.44 | 2.66  | 2.13 |
| 1/2"                             | 2.00                                       | 0.50                               | 0.81                     | 0.63 | 0.50 | 0.50 | 1.81 | 1.19 | 1.63 | 3.03  | 2.38 |
| 5/8"                             | 3.25                                       | 1.21                               | 1.06                     | 0.75 | 0.62 | 0.63 | 2.31 | 1.50 | 2.00 | 3.75  | 2.91 |
| 3/4"                             | 4.75                                       | 2.00                               | 1.25                     | 0.88 | 0.81 | 0.75 | 2.75 | 1.81 | 2.38 | 4.53  | 3.44 |
| 7/8"                             | 6.50                                       | 3.28                               | 1.44                     | 1.00 | 0.97 | 0.88 | 3.19 | 2.09 | 2.81 | 5.33  | 3.81 |
| 1"                               | 8.50                                       | 4.75                               | 1.69                     | 1.13 | 1.00 | 1.00 | 3.69 | 2.38 | 3.19 | 5.94  | 4.53 |
| 1-1/8"                           | 9.50                                       | 6.30                               | 1.81                     | 1.25 | 1.25 | 1.13 | 4.06 | 2.69 | 3.58 | 6.78  | 5.13 |
| 1-1/4"                           | 12.00                                      | 9.00                               | 2.03                     | 1.38 | 1.38 | 1.25 | 4.53 | 3.00 | 3.94 | 7.50  | 5.50 |
| 1-3/8"                           | 13.50                                      | 12.00                              | 2.25                     | 1.50 | 1.50 | 1.38 | 5.00 | 3.31 | 4.38 | 8.28  | 6.13 |
| 1-1/2"                           | 17.00                                      | 16.15                              | 2.38                     | 1.63 | 1.62 | 1.50 | 5.38 | 3.62 | 4.81 | 9.06  | 6.50 |
| 1-3/4"                           | 25.00                                      | 29.96                              | 2.88                     | 2.00 | 2.12 | 1.75 | 6.38 | 4.19 | 5.75 | 10.97 | 7.75 |
| 2"                               | 35.00                                      | 43.25                              | 3.25                     | 2.25 | 2.00 | 2.10 | 7.25 | 4.81 | 6.75 | 12.28 | 8.75 |

NUNCA EXCEDA LAS CAPACIDADES DE CARGA